

Avoid Prolonged Exposure to Vibration

Tools can vibrate during use. Prolonged exposure to vibration or very repetitive hand and arm movements, can cause injury. Stop using any tool if discomfort, tingling feeling or pain occurs. You should consult your physician before resuming use of the tool.

90 PSIG Maximum

This tool is designed to operate at an air pressure of 90 pounds per square inch gauge pressure (90 PSIG) maximum, at the tool. Use of higher air pressure places the internal components under loads and stresses they were not designed for, causing premature failure. The air supply should be clean and dry, preferably lubricated. For best results, drain the moisture from your compressor daily.

Limited Warranty

Nailout Industries, Inc warrants its tools to be free from defects in material and workmanship for one year from the date of purchase. This warranty does not apply to tools which have been abused, misused, modified or repaired by someone other than Nailout Industries, Inc or its authorized service centers. If a Nailout Industries, Inc tool proves defective in material or workmanship within one year after purchase, return it to any authorized service center or to Nailout Industries, Inc, freight prepaid. Please enclose your name, address, and adequate proof of purchase date with a brief description of the defect. Nailout Industries, Inc will, at its option, repair or replace defective tools, free of charge. Repairs or replacements are warranted as described above for the remainder of the warranty period. Nailout Industries, Inc sole liability and your exclusive remedy under this warranty is limited to repair or replacement of the defective tool. There are no other warranties expressed or implied and Nailout Industries, Inc nor its suppliers shall be liable for incidental, consequential or special damages, or any other damages, costs or expense of repair or replacement as described above.

WARNING:

Some dust created by power sanding, sawing, grinding, drilling, and other construction activities contain chemicals known to cause cancer, birth defects or reproductive harm. Some examples of these chemicals are:

- Lead from lead-based paints

- Crystalline silica from bricks, cement and other masonry products

- Arsenic and chromium from chemically treated lumber

Your risk from these exposures varies, depending on how often you do this type of work. To reduce your exposure to these chemicals, work in a well-ventilated area and work with approved safety equipment such as those dust masks that are specially designed to filter our microscopic particles.

Nailout Industries, Inc cannot be responsible for negligence on the part of the user nor can Nailout Industries, Inc be responsible for inherent risks in the construction industry.

Made in China



NailOut

USER GUIDE


NOPP1, NOPP2, & NOPP3

Tool Maintenance (continued)

Tools shall be disconnected from their compressed air supply before repairs are attempted. Repairs shall be consistent with the manufacturer's recommended procedures. Tool, hoses and fittings shall be replaced if unsuitable for safe operation. It shall be the tool owner's and/or employer's responsibility to keep required rating markings and warnings on the tool in legible condition.

Tool Specifications

Stroke	1 1/8"
Blows per min	4,600
Shank Type	Chisel Retainer
Weight	4lbs.
Length	10-1/4"
Width	1-5/8"
Air Inlet	1/4"
Average Air Consumption	4 CFM
Maximum operation pressure	90 PSI

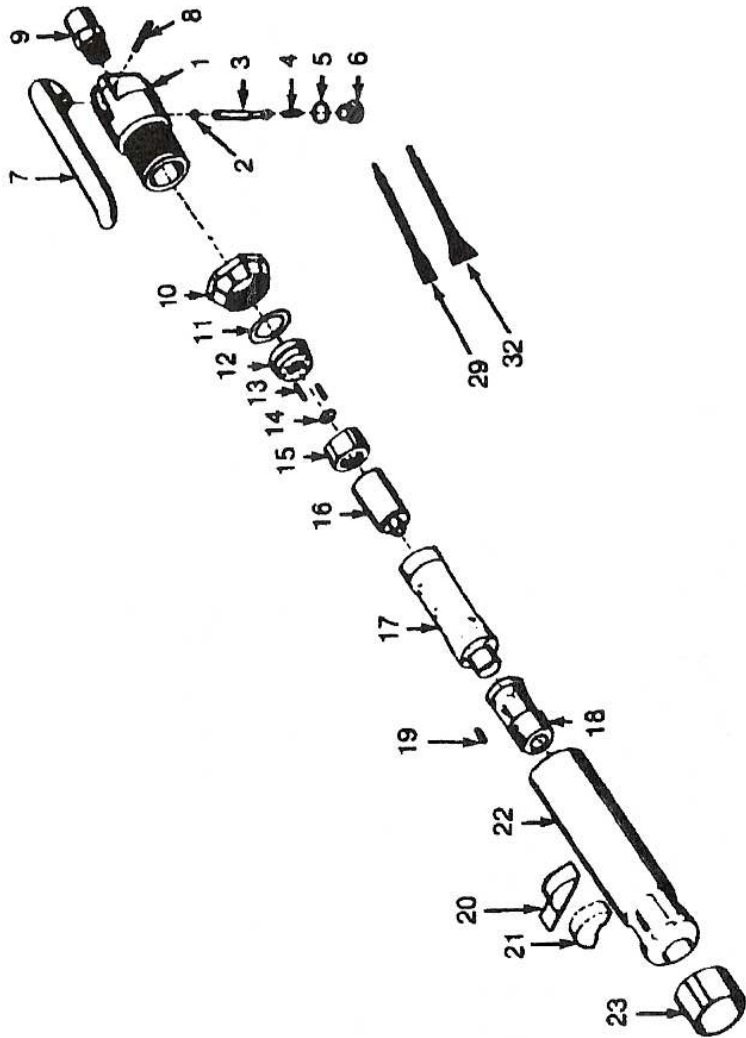

**PLEASE READ AND FOLLOW
ALL WARNINGS**



Read Operating Instructions

Always become familiar with all the instructions and warnings before operating any power tool.

Always wear approved eye protection



Impact resistant eye protection should meet or exceed the standards as set forth in the United States ANSI Z87.1, Occupational and Educational Eye and Face Protection. Look for marking Z87.1 on your eye protection to insure that it is approved style. For further information, ANSI Z87.1, Occupational and Educational Eye and Face Protection, is available from the American National Standards Institute, Inc., 11 West 42nd Street, New York, NY 10036.

Hearing Protection is Recommended



Hearing protection should be used when the noise level exposure equals or exceeds an 8 hour time-weighted average sound level of 85 dBA. Process noise, reflective surfaces, other tools being operated nearby, all add to noise level present in your work area. If you are unable to determine your noise level exposure, we recommend the use of hearing protection.

Description

NailOut Removes Nails with the Ease and Speed of Air. It's handheld size coupled with pneumatic power makes this tool up to 10 times faster than a cats paw. This tool specializes in removing nails from metal fasteners and other hard-to-reach places.

Safety Instructions

The following instructions are furnished as general guidelines for use of your pneumatic tool. They cannot comprehensively cover all possible or conceivable uses of the subject tool. For additional information on the safe use of air tools, we advise you to obtain a copy of ANSI B186.1 Safety Code for Portable Air Tools, available from the following source:

American National Standards Institute, Inc.

11 West 42nd Street
New York, NY 10036

The use of the word "shall" in the following instructions, indicates that adherence to the particular requirement is necessary to conform to ANSI B186.1

Tool Application and Usage

Portable tools shall be used only for the purposes intended in their design and within the capacity for which they were intended and rated. It shall be the tool owner's and/or employer's responsibility to instruct each operator in the safe use of the tool. Tools shall not be used without guards and safety devices as furnished by the manufacturer. Where an air tool is modified or altered, the modifier shall provide the safeguards to enable it to be safely used in the operations intended and to comply with any application provisions as contained in ANSI B186.1

Tool Installation

Pressure regulators shall be used to limit air pressure to the rated pressure where the supply pressure exceeds the tool's rated pressure. Air hoses and lines shall be relieved of compressed air before being disconnected or dis-jointed, unless this is automatic valve closing protection at the joint being separated. Synthetic lubricants which can cause deterioration of elastomer seals shall not be used in air systems of air tools.

Tool Maintenance

It shall be the tool owner's and/or employer's responsibility to assure that tools are maintained in a safe operation condition. Tool maintenance and repair shall be performed by authorized, trained, competent personnel.

Order Form	
Part Number	Quantity
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	
17	
18	
19	
20	
21	
22	
23	
29	
32	